Programmes After Market Services
NPB-1NB Series Transceivers

Non Serviceable Accessories

Issue 1 Feb 2001
©Nokia Mobile Phones Ltd.

Table of Contents

Page No

BMC-2 Battery Pack 3
BMC-3 Battery Pack 4
BLC-2 Battery Pack 5
ACP-7 AC Travel Charger 6
ACP-8 Performance Travel Charger 7
DCV-10 Desktop Stand 8
LCH-8 Cigarette Lighter Charger 9
LCH-9 Cigarette Lighter Charger 10
PPH-1 Plug and Play Hands Free Cigarette Charger 11
HFM-8 Handsfree Microphone 12
HDE-2 Headset 13
HDC-5 Headset 14
LPS-3 Loopset 15

©Nokia Mobile Phones Ltd.

BMC-2 Battery Pack

The BMC-2 is a Ni-MH type battery with a rating of 640mAH

Product Code

BMC-2 Battery Pack :*0670323*

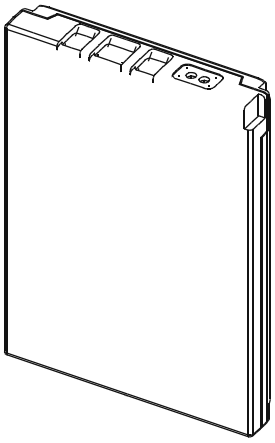

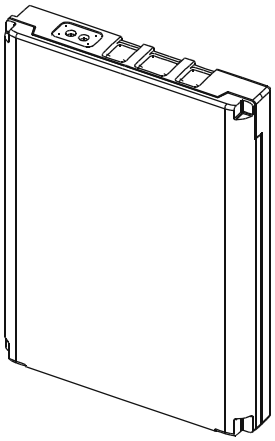

©Nokia Mobile Phones Ltd.

BMC-3 Battery Pack

The BMC-3 is a NiMH type battery with a rating of 900mAH

Product Code

BMC-3 Battery Pack:*0620285*

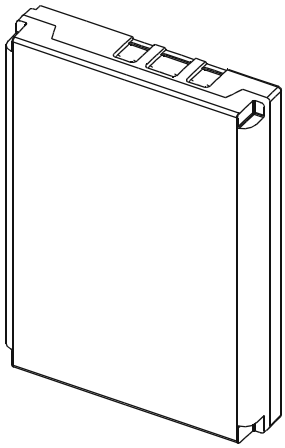

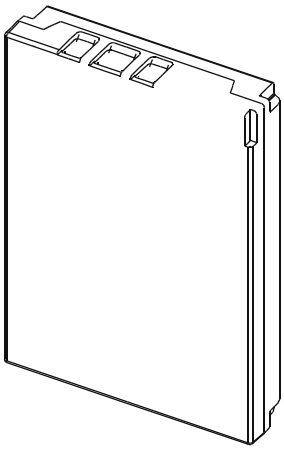

©Nokia Mobile Phones Ltd.

BLC-2 Battery Pack

The BLC-2 is a Li-ION type battery with a rating of 850mAH

Product Code

BLC-2 Battery Pack:*0670279*

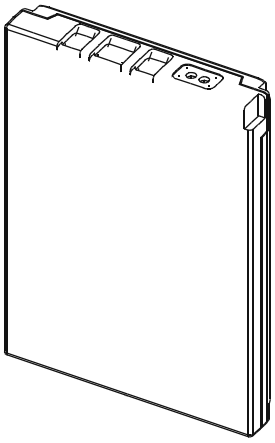

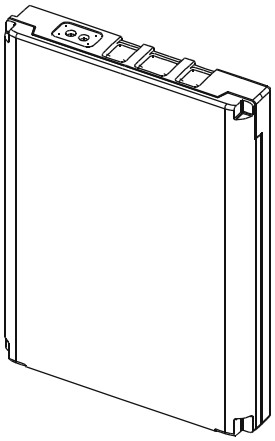

©Nokia Mobile Phones Ltd.

ACP-7 AC Travel Charger

The standard charger is available for different voltage levels and comes with different wall plugs. The standard charger can also be used as a power supply for the desktop stand.

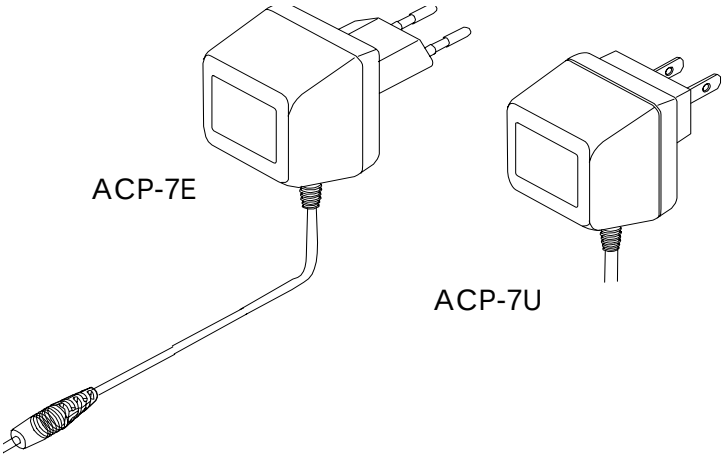

Product Codes

ACP-7E AC Travel Charger(Europlug) 207-253 Vac	0675144
ACP-7U AC Travel Charger(USplug) 108-132 Vac	0675143

Specification

Output connectors:	*3.5 mm DC plug, 2-pole*
Protection:	PTC protection
Output Voltage /Current (typ)	7.6 V / 370 mA

©Nokia Mobile Phones Ltd.

ACP-8 Performance Travel Charger

Operating within the voltage range 90 V...264 V AC (50 Hz...60 Hz), the Per formance Travel Charger is practically current independent in normal office and household use. Like the standard charger, it is compatible with all bat tery options and is available for different wall sockets.

The Performance Travel Charger can also be used with desktop stand.

ACP-8E

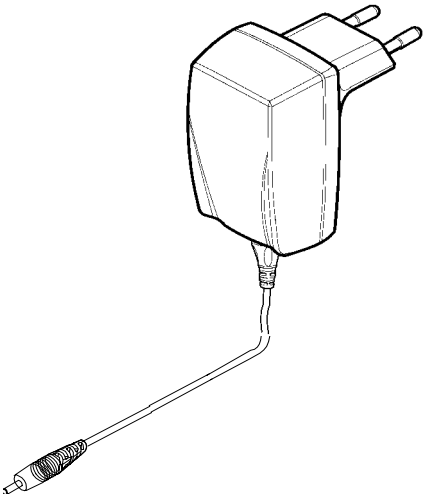

ACP-8U



Product Codes

ACP-8E	Performance Travel Charger Euro plug 90-264 Vac	0675195
ACP-8U	Performance Travel Charger US plug 90-264 Vac	0675196

Specification

Output connectors: 3.5 mm DC plug, 2-pole (+, -, control)

Protection: Output fault voltage 16 V max.

Output voltage/current (typ): 6.0 V (+0.3 V)/ 620 mA

©Nokia Mobile Phones Ltd.

DCV-10 Desktop Stand

The desktop stand provides mounting place for charging battery with transceiver.

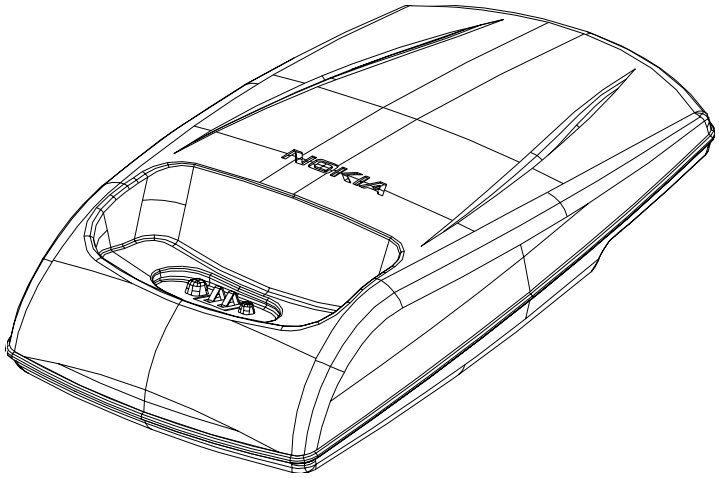

Product Code

DCV-10 Desktop stand :0675229

Specification

Connections: *3.5 mm DC jack (ACP-7 or ACP-8)*

©Nokia Mobile Phones Ltd.

LCH-8 Cigarette Lighter Charger

A green light indicates that the cigarette lighter charger is ready for charg ing. Check the charging status on the phone display. The main use is with 12V vehicle system. It is using 3-wire charging structure (controlled constant voltage). It has internal output current limitation of 650mA.

The car battery connectors must perform reliable electrical connection to the cigarette lighter socket.

Product Code

LCH-8 Cigarette lighter charger : *0675231*

Specification

Output connectors: 3.5 mm DC plug, 3 pin.

Protection: *input fused, output current limit 650 mA*

Voltage

- input: 10.8...32 V
- output: This is controlled by the phone via 3:rd wire.

©Nokia Mobile Phones Ltd.

LCH-9 Cigarette Lighter Charger

A green light indicates that the cigarette lighter charger is ready for charg ing. Check the charging status on the phone display. The input voltage can be from 11 or 32 V d.c., negative grounding.

Universal mobile charger can be used with all car accessories provided for your phone except MCC-1.

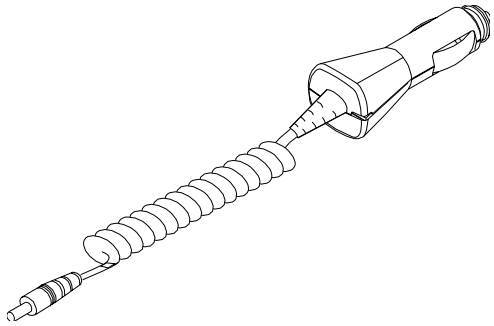

Product Code

LCH-9 Cigarette lighter charger : *0675120*

Specification

Connectors

- input: D 21/23 mm
- output: *3.5 mm DC plug*

Protection: *input fused, output current limit 850 mA*

Voltage

- input: 11...32 V
- output (nominal): 8.4 V

Nominal output current: *800 mA*

©Nokia Mobile Phones Ltd.

PPH-1 Plug and Play Hands Free Cigarette Charger

The PPH-1 provides rapid charging for the phone and possibility for HF operation. The PPH-1 plug and play handsfree unit is connected directly to the cigarette lighter in a car. PPH-1 is connected to Mobile phone with the cable. The cable has combinated connector with charger - and head set connectors.

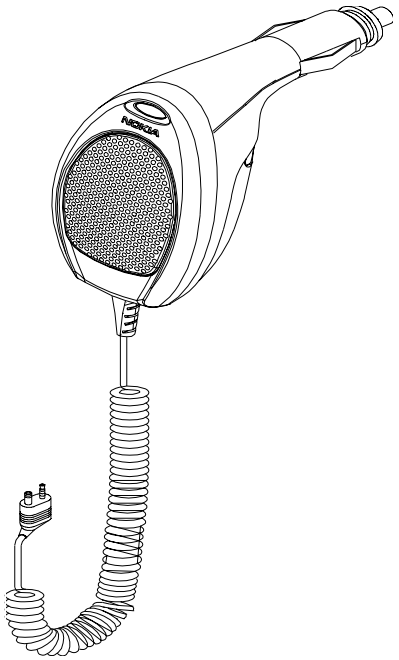

Product Code

PPH -1 Hands free unit : *0675182*

Specification

Output connectors:	3.5 mm DC plug, 2-pole (+, -, control)
Intput voltage:	8-16VDC
Protection:	Output fault voltage 16 V max.
Output current:	750 mA max.

©Nokia Mobile Phones Ltd.

HFM-8 Handsfree Microphone

The HFM-8 microphone can be used together with PPH-1 plug and play handsfree unit.

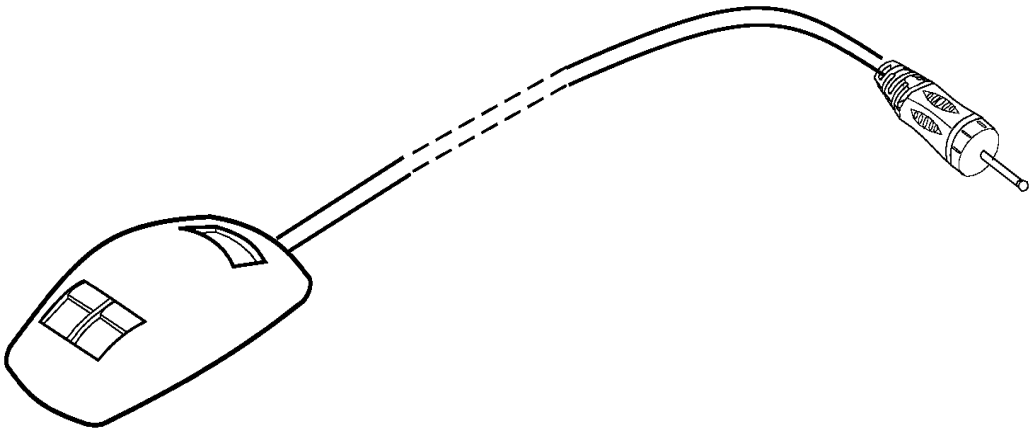

Product Code

HFM-8 Handsfree microphone : *0690016*

©Nokia Mobile Phones Ltd.

HDE-2 Headset

The HDE-2 is the standard headset.

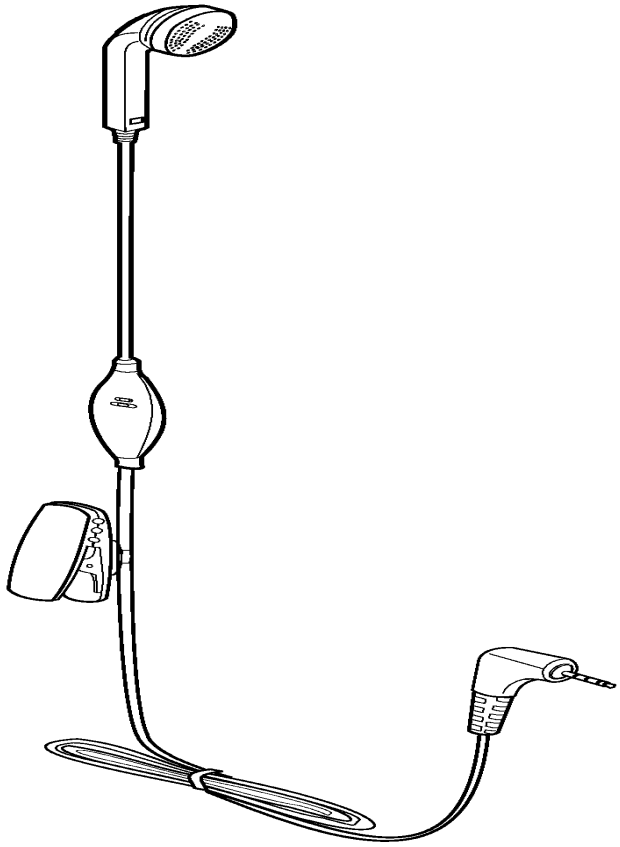

Product Code

HDE-2 Headset : *0694075*

©Nokia Mobile Phones Ltd.

HDC-5 Headset

The HDC-5 headset provides a hook switch for the phone/micro phone.

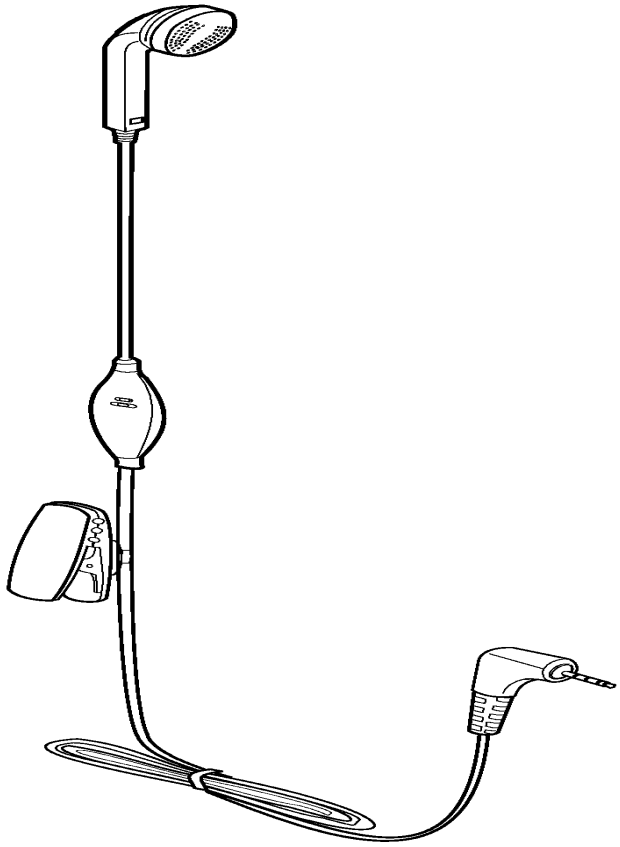

Product Code

HDC-5 Headset : *0694059*

©Nokia Mobile Phones Ltd.

LPS-3 Loopset

Loopset LPS-3 has been developed for hearing aid users to allow them to use mobile phones. It is based on induction technology.

All hearing aids have support for induction loop, ie. they have a little tele coil inside. This coil can capture the signal supplied to the loop. Standard hearing aids have two operation modes; M-mode for normal microphone use and T-mode for telecoilProduct Code

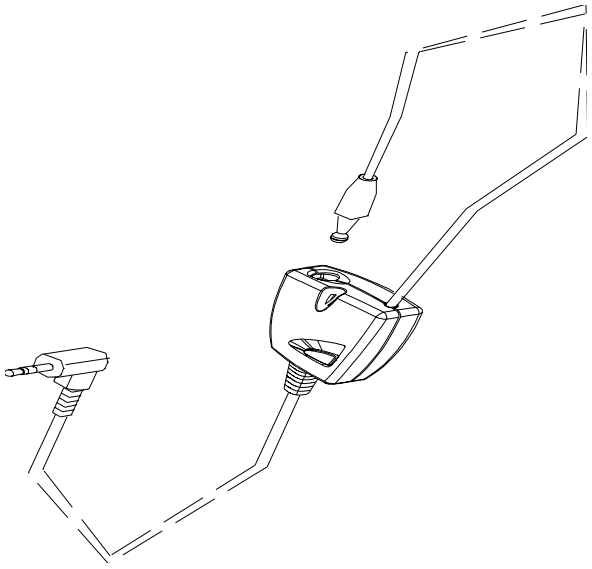

Product Code

LPS-3 Loopset : *0630244*

Recommended Batteries

Type	Size / IEC-type	Rated capacity	Talk time (3mA load)	Standby (20uA load)
Zinc Air Hearing Aid Battery	675 / PR44	540 mAh	180 hour.	840 hour or 35 day (1)
Silver Oxide Hearing Aid Battery	675 / SR44	150 mAh	50 hour.	7 500 hour or 310 day.
Alkaline Battery	675 / LR44	110 mAh	36 hour.	5 500 hour or 230 day.

Note (1): *The capacity of the zinc air battery will fall 20% in a month. After the activation the zinc air battery begins to self-discharge. The battery will be empty within 5 weeks.*

©Nokia Mobile Phones Ltd.

This page intentionally left blank.

©Nokia Mobile Phones Ltd.